


Axial Leads Multilayer Ceramic Capacitors

Features

Wide capacitance, temperature, voltage and tolerance range;
Industry sizes; Tape and Reel available for autoplacement.

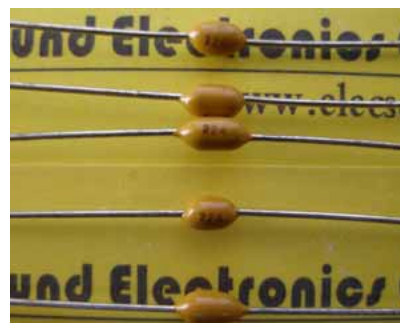

Size Code Capacitance and Voltage

	Size	Dimensions (mm)				Voltage	Capacitance (PF)			
		Lmax	Dmax	F	D		COG(NPO)	X7R	Y5V(Z5U)	
	17	4.3	2.5	5.0	10	0.45	25V	0R5~332	331~104	103~105
							50V	0R5~222	331~473	103~684
							100V	0R5~102	331~223	
	20	5.1	3	7.5	10	0.45	25V	0R5~472	102~224	103~125
							50V	0R5~392	102~104	103~105
							100V	0R5~152	102~683	

How to order

CT42 104 Z 17 Y 500 T


CT42	104	Z	17	Y	500	T
Type	Cap.(pF)	Cap. Tolerance	Companet Length	Dielectric	Voltage	Package
CC42 class axial	104=100000(pF)	C=±0.25pF	(inch)	N=NPO	500=50V	T=Tape & Reel
leads MLCE	Two significant	D=±0.50pF		B=X7R	101=100V	A=Ammo
CT42 class axial	digits followed by	J=±5.0%	17	Y=Y5V		
leads MLCE	no. of zeros	K=±10%	20	(Z5U)		
		M=±20%				
		Z=+80%/-20%				

General specifications

	CC42 (NPO)		CT42 (X7R)		CT42 (Y5V, Z5U)				
Capacitance Range	OR5 to 472		331 to 224		103 to 125				
Temperature Coefficient	0±30PPm/ 0±60PPm/	(-55 to +125)	±15% (-55 to 125)		+30%~80% (-25 to 85) +22%~56% (+10 to 85)				
Insulation Resistance	C ≤10nF R ≥ 10000MΩ		C ≤25nF R ≥ 4000MΩ						
	C > 10nF C. R ≥ 100S		C > 25nF C. R ≥ 100S						
With Standing Voltage	2.5 × W V D C								
Dissipation factor	0.15%max (20 , 1MHZ, 1VDC)		2.5%max (20 , 1kHz, 1VDC)		5.0%max (20 , 1kHz, 0.3VDC)				
Rated Voltage	25, 50, 63, 100VDC				25, 50, 63VDC				
Capacitance Tolerance	B=±0.1PF	C=±0.25PF			Top				
	D=±0.5PF	F=±1%	K=±10%	M=±20%	M=±20%	S= <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>+50</td></tr><tr><td>-20</td></tr></table> %	+50	-20	
	+50								
	-20								
G=±2%	J=±5%	S= <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>+50</td></tr><tr><td>-20</td></tr></table> %	+50	-20		Z= <table border="1" style="display: inline-table; vertical-align: middle;"><tr><td>+80</td></tr><tr><td>-20</td></tr></table> %	+80	-20	
+50									
-20									
+80									
-20									
K=±10%	M=±20%								
Life Test (1000hours)	200% Rated Voltage at +125 1000h				150% Rated Voltage at +85 1000h				
Soderability	SJ/T10211-91 4.11		SJ/T10211-91 4.11						
Resistance to Soldering Heat	SJ/T10211-91 4.10		SJ/T10211-91 4.10						
Mechanical Test	SJ/T10211-91 4.9		SJ/T10211-91 4.9						
Temperature Cycling	SJ/T10211-91 4.12		SJ/T10211-91 4.12						
Moisture Resistance	SJ/T10211-91 4.14		SJ/T10211-91 4.14						
Termination adhesion strength	SJ/T10211-91 4.9		SJ/T10211-91 4.9						
Environment Testing	SJ/T10211-91 4.13		SJ/T10211-91 4.13						

Packaging Style

> Reel Package >>>

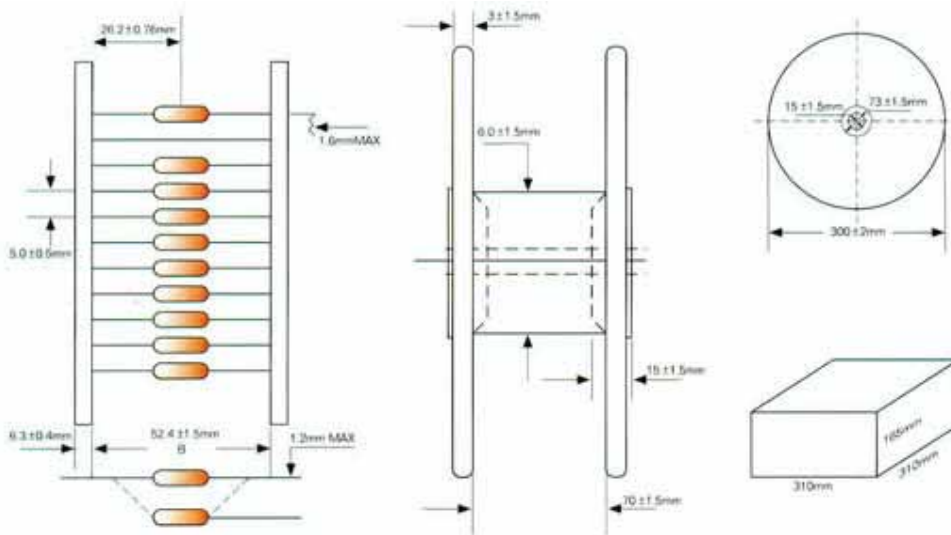

> Package Q'ty >>>

Size	Reel Package	Ammo Package	Bulk
9	5000	5000	1000,5000
20	2500	2500	500